



010101001010101010011110
1010101010010101010
10101010100101010100011110101010101000010

POINTMAN Card Printer

TP-9200 / TP-9000

Card Printer on Your Desk



TP-9200




POINTMAN

POINTMAN Card Printer



TP-9200 / 9000

- Easy to Print Photo ID Card
- Reliable to Encode Mag. Stripe/IC/RF Card
- Flexible Card Printer for the Daily Card Printing

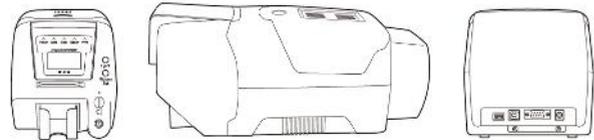


► Main Features

- Color & Monochrome printing
- Easy to exchange ribbon & TPH
- Video CD & Maintenance Manual
- Strong encoding based on long banking experience.
- Individual card slot for reprinting
- Design software 'TheDesigner'
- RFID ribbon protection

► Options

- Magnetic stripe encoder (4 Million passes)
- Contact Smart Card encoder (1 Million contacts)
- Contactless Smart Card encoder
- Ethernet (10/100 Mbps)
- Flipper module for Dual side printing

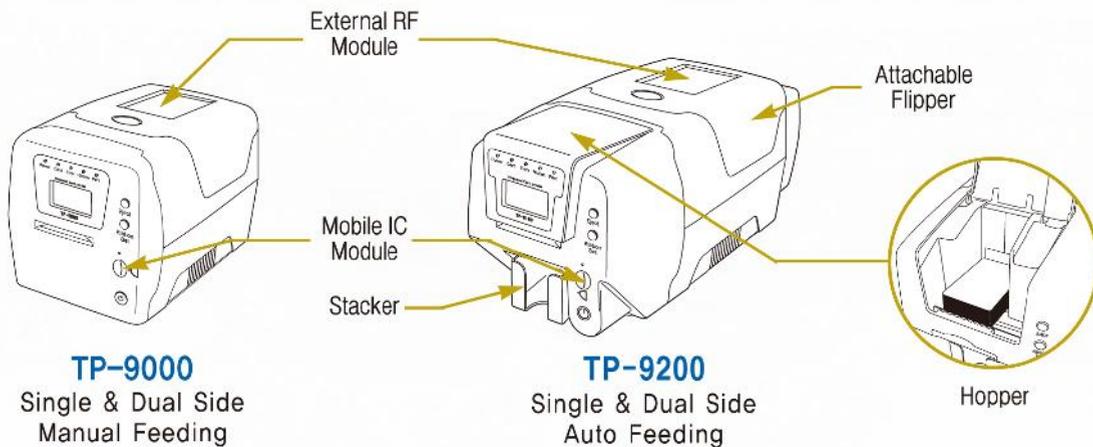

► Specifications Card Printer TP-9200



Printer Standard Features

Print Technology	Direct-to-card Dye-sublimation / Resin thermal transfer
Print Capabilities	One or Two Sided, edge-to-edge printing Full-color and monochrome printing capability Alphanumeric text, logos and digitized signatures
Print Resolution	300 dpi (11.8 dpm), 16.7 Million Color
Print Speed	Full-color Printing : Single side (YMCKO) – up to 210 cards /hr. Dual side (YMCKO-K) – up to 155 cards /hr. Monochrome : up to 850 cards /hr.
Card Capacity	Automatic Feed : 100-card input for 0.4mm ~1.2mm cards 70-card output standard Manual Single Feed : 1-card input

Printer Option

Magnetic Stripe Encoding	ISO7811 (Track 1,2,3), Coercivity : HiCo/LoCo
Smart Card Personalization	ISO, EMV – Contact Landing Type
RF ID Card	Mifare, ISO 14443 A / B, ISO15693
SAM	PLCC 1 (Extra-2 Sockets), SIM 4 sockets
Mobile Chip Card	ISO 7816

Printer Specifications

Dimensions	Single : 403(L) × 192 (W) × 202 (H)mm Dual : 471(L) × 192 (W) × 202 (H)mm
Weight	Single : 5.5kg Dual : 6.5kg
Power	Input : 100V~250V, 50/60Hz, Output : DC 24V
Font	True Type Fonts via Window Drivers
Memory	1GB RAM
Interface	USB2.0 (High-Speed), RS-232, Built in 10/100 Ethernet
Operating System for Printer Driver	All 32-bit and 64-bit compatible : Windows® 7, Windows Vista®, XP, Windows 2008 Server, Windows 2003 Server
Approvals	FCC Class A, CE (EN 55022 Class A, EN 55024), CCC, KCC
Software	TheDesigner™

Printer Specifications (TP-9000)

Dimensions	Single : 292(L) × 192 (W) × 196 (H)mm Dual : 395(L) × 192 (W) × 196 (H)mm
Weight	Single : 4.5kg Dual : 5.0kg

